


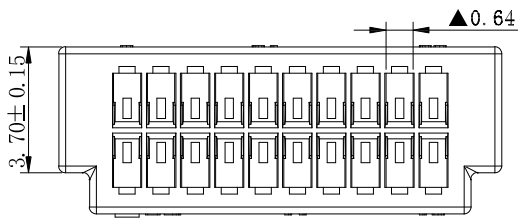


REV	DESCRIPTION	DESIGN	DATE
A0	Release	蒋建银	2016.05.25






SEC:A-A

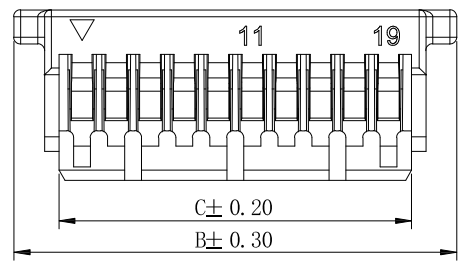

主要技术参数 Main Specifications

- 线数 (Poles): 02 to 25
- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 100M\Omega$
- 额定电压 (Rated voltage): 50V AC DC
- 额定电流 (Rated current): 1.0A AC DC
- 耐电压 (Withstand Voltage): 500V AC/minute
- 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

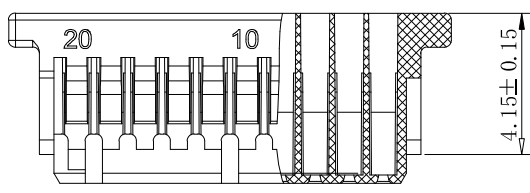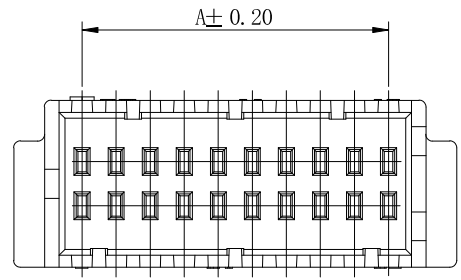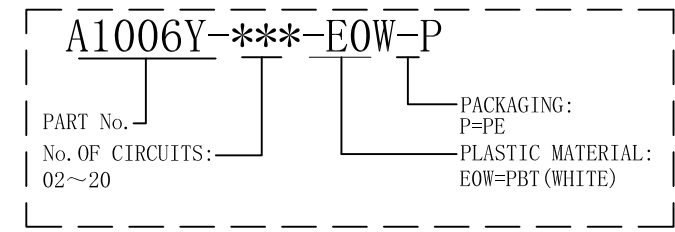

Circuit No.	Dimensions		
	A	B	C
2X06P	5.00	9.00	6.35
2X08P	7.00	11.00	8.35
2X09P	8.00	12.00	9.35
2X10P	9.00	13.00	10.35
2X15P	14.00	18.00	15.35
2X20P	19.00	23.00	20.35
2X25P	24.00	28.00	25.35

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B				
A	PEDESTAL	1 PCS	PBT	COLOR:WHITE, UL94-V0

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.		USE: CUSTOMER	TITLE: - 1.0mmPITCH HOUSING
X±0.5	X±5'	APPD: 王亮	PART NO.: A1006Y-***-E0W-P
.X±0.3	.X±2'		CHKD: 刘振岭
.XX±0.25	.XX±1'	DR: 蒋建银	SCALE: 1 : 1
UNITS: mm			SHEET: 1 / 1